

Space Solar Power Systems of Gyroscopic and Cyclic Functioning with Element Compatibility of Components and New Algorithm of Conversion of Thermal Radiation

Yu.M. Mar'yinskykh

**Gyroscopic Solar Power Satellite with the New Thermal Conversion System and Superconductive
Generator**

DOI: 10.3103/S0003701X19060070

New Generation Thermodynamic Autonomously Managed Space Solar Power Plant

DOI:10.1134/S1810232814040109

The Material of the Working Fluid of the Solar Energy Heat Converter for Space Application

DOI: 10.2412/mmse.90.3.605



Problems in the Development and Implementation of SPS Projects

The scientific and practical significance of the developed projects of space solar power systems of gyroscopic and cyclic functioning should be presented in the context of a brief acquaintance with the previously developed companies "Boeing", "Rockwell Int" under the NASA program with the participation of the Nobel Prize laureate physicist P. Glazer.

The main problem in the development of projects for space solar power plants (SSPS) was the choice of thermal or photovoltaic conversion system.

Despite all the advantages: the high efficiency of the thermal conversion system (up to 39%), the technology for the production of turbine generators with a developed industrial base has been mastered, the use of not scarce materials that are resistant to the effects of space radiation, there are factors that hinder the implementation of these projects. These include the large specific gravity of the conversion system on average equal to $3.4 \text{ kg}\cdot\text{kW}^{-1}$ [1], Solar Power Satellite (SPS) (see Table).

Elements	Weight, T
Heat dissipation system	10769
Basic structure	6254
Working body (potassium)	6085
PTP with electric generators (1.15 GW)	1933
Facets	1837
Radiation receivers	1000
Secondary capacitors	324
Total:	48175

The designers of the SPS (the author's assumption) relied on a strategy for the future development of the space industry, in which the launch vehicles are capable of launching payloads with the required weight and size characteristics into geostationary orbit. So projects with gas turbine conversion systems, designed to obtain 10 GW of electrical power at the output electric buses of the ground receiving rectenna, were subjected to changes in the subject of thermal systems [3,4]. As a result, a need arose for a guidance system to keep the reflected radiation above the entrance to the receiver opening. A guidance system was developed.

This system is not a solution to the guidance problem, since during the operation of the SPS, mechanical vibrations will occur that are as close to resonating as possible, which leads to zero the expected effect. Mechanical vibrations will be transmitted through the conversion system and can lead to the likelihood of destruction of individual resonate units and parts of the SPS. This problem is not considered in projects.




Direct photovoltaic conversion system has several advantages on deploying flexible photoconverting panels with relatively low mass parameters in space . Today it is a priority and partially started to be implemented by the leading space countries.

However, it is difficult to calculate the cost of producing the required amount of photoconverting material and working elements from it. There is no unambiguity in the cost of one kilowatt of electricity generated by the orbital SPS taking into account the resource of solar cells in space. These factors, as well as the problems of implementation of projects of thermal solar power plants, give grounds to reconsider the traditional methods of converting thermal solar energy into a solar power plant.




At the present stage, the possibility - of using super-strong and lightweight structural materials made of carbon-carbon composites for the manufacture of the frame and load-bearing elements of power systems for space purposes has arisen. The use of high-temperature superconductors and superconducting electric generators created on their basis can significantly reduce the weight and size parameters of the superconducting SPS of the thermal conversion system.

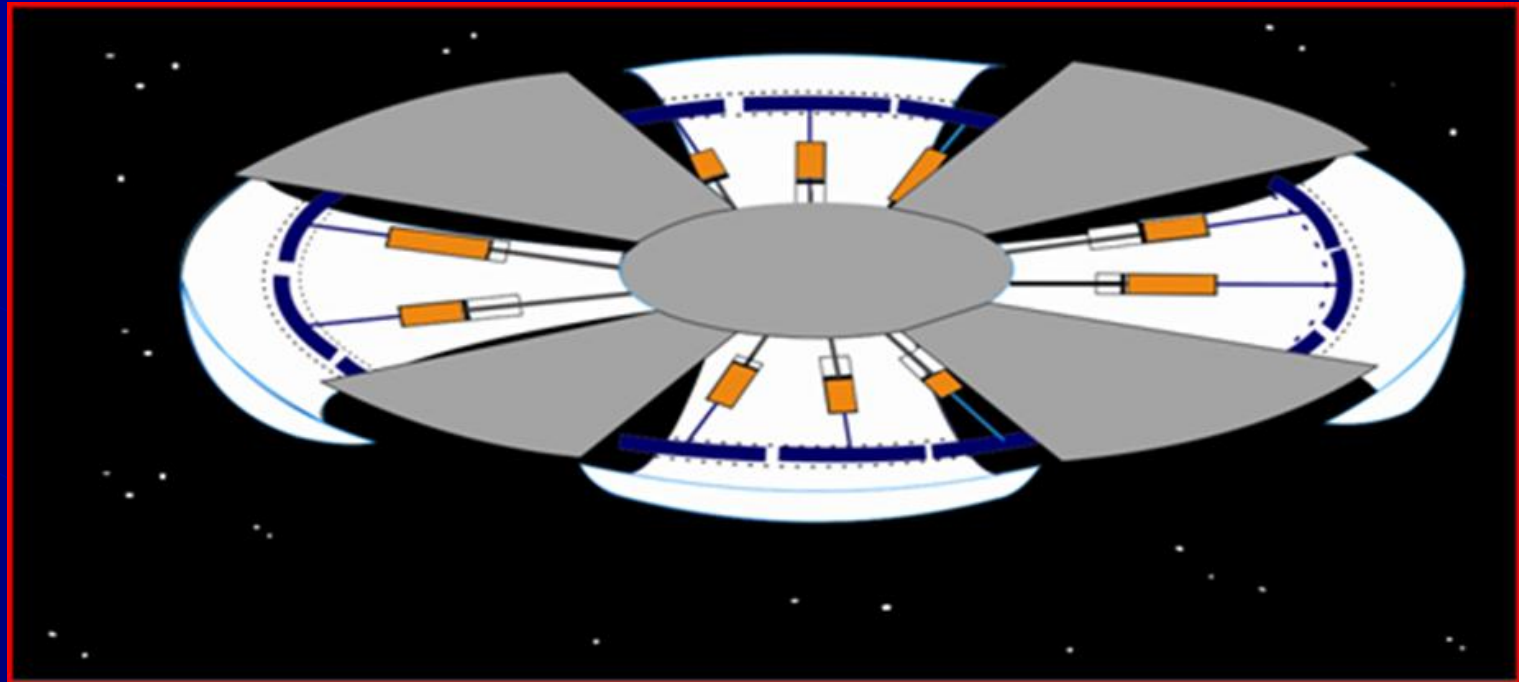

Unique features of a gyroscopic satellite solar power plant (GSPS) with a new thermal conversion system (TCS) and a superconducting generator


Main features of the proposed project is that it has the ability to convert solar energy into mechanical and electrical in the required ratios. The project provides for the possibility of placing and creating a high-tech production at the power plant with controlled artificial gravity.

The features of GKSE should be attributed to low costs when creating relatively cheap components compared to photoconverting GSPS, for which heterostructured (multilayer) flexible CIGS solar cells based on $\text{Cu}(\text{InGa})\text{Se}_2$ are considered suitable. But due to the complexity of the technological process on unique equipment, when they are manufactured by different manufacturers, the cost ultimately turns out to be very high. Large surfaces of such expensive photoconverters cannot be protected from the destructive effects of electrons, protons and meteor showers.

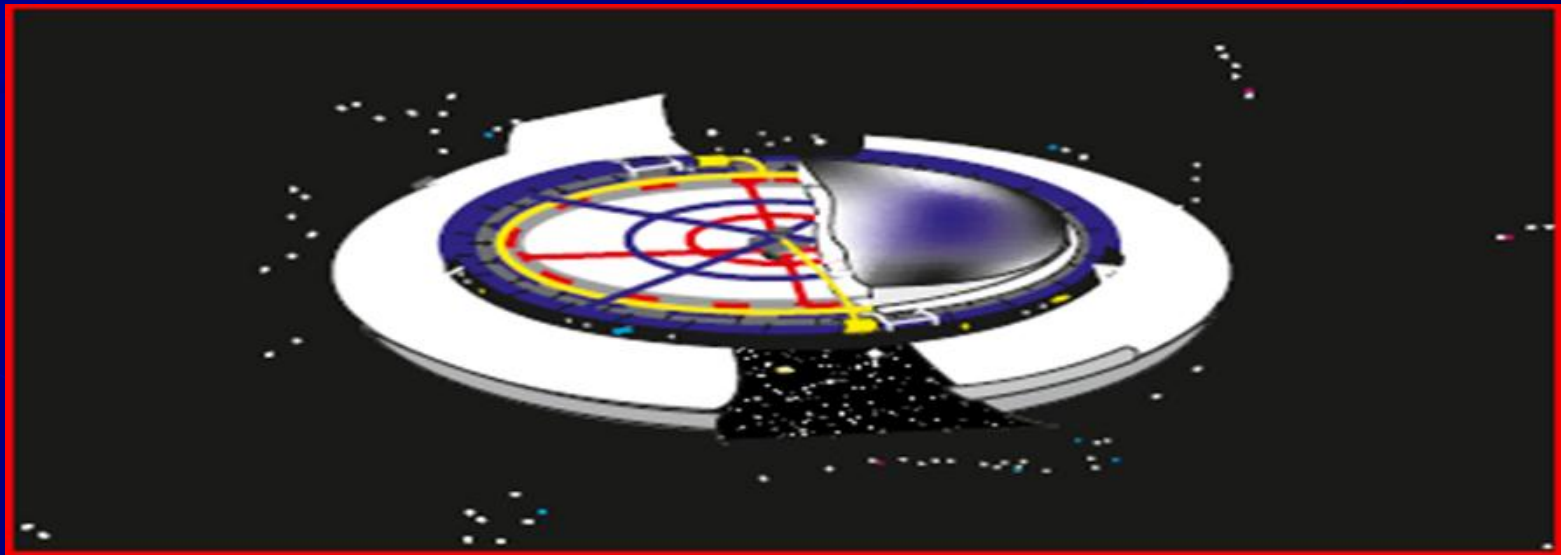

A feature of the created project of a gyroscopic solar power satellite with a new thermal conversion system (TCS) and a superconducting generator is a fundamentally different approach to converting the energy of the full spectrum of solar radiation into mechanical and electrical in the required ratios than had previously been developed in the field of space energy. The construction of the power plant provides for the creation and deployment of high-tech production with controlled gravity.

The design makes it possible not to use steam and gas turbine installations, a guidance system, as well as a radiator refrigerator, the mass of which would be about half of its total mass. Their role is played by heat-converting modules moving in a circular tunnel cavity "heat trap", which has a transparent surface with a low-emission coating. The use of high-temperature superconductors in GSPS, as well as heat-resistant and lightweight structural materials made of carbon-containing composites, significantly improves its energy and weight and dimensions. This can be inexpensive when it is created with relatively cheap components compared to photoconverting SPS. The principle of operation of the power plant realizes the possibility of basing similar converters on celestial objects.

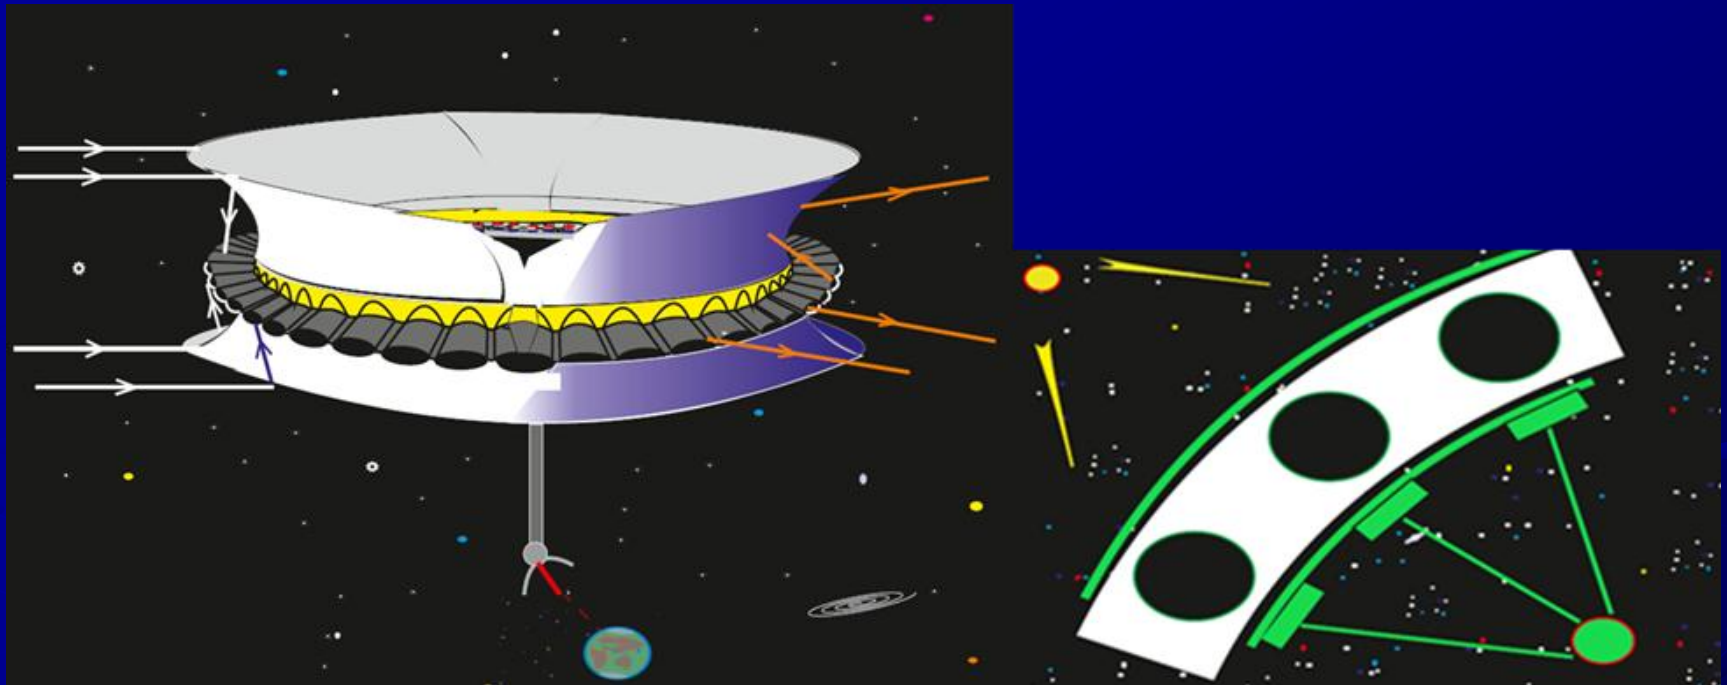


The use of high-temperature superconductors (HTSC) of the 2nd generation in the power plant, the production of which has already been mastered, as well as heat-resistant and lightweight structural materials made of carbon-containing composites [16,17,18,19] significantly improves its energy and weight and dimensions. The combination of a high-temperature heat sink and low-temperature superconducting circuits of the generator located behind the heat shield makes it possible to set the required temperature regime in space during the entire life cycle.

Gyroscopic Space Solar Power Plant with New Thermal Conversion System and Superconducting Generator


DOI: 10.3103/ S0003701X19060070

Abstract . The analysis of methods for converting solar energy in projects of space solar power plants and analyzes the problems hindering their implementation. The efficiency of its operation is explained by its design feature, as well as the use of ultra-strong materials made of carbon composite, a transparent low-emission magnetron coating of a circular tunneling cavity "heat trap" and high-temperature superconductors.

The device and the principle of operation of the power plant are considered in detail. An assessment of the energy and weight and size parameters is given, the calculation of specific indicators during operation is carried out, depending on the degree of solar concentration and the type of the working fluid. The following evaluation results are presented: thermal efficiency of conversion as a working medium of helium at a concentration of solar energy 74 and water vapor at 38 was 85% and 62.7%, respectively; the specific gravity of the entire thermal conversion system was $2.17 \text{ kg} \cdot \text{kW}^{-1}$ and $2.61 \text{ kg} \cdot \text{kW}^{-1}$; its specific power is $12.3 \text{ kW} \cdot \text{m}^{-2}$ and $6.79 \text{ kW} \cdot \text{m}^{-2}$, the specific gravity of the power plant was $0.46 \text{ kW} \cdot \text{kg}^{-1}$ and $0.38 \text{ kW} \cdot \text{kg}^{-1}$. The proposed operating principle can be used at space power plants based on planets and the Moon.

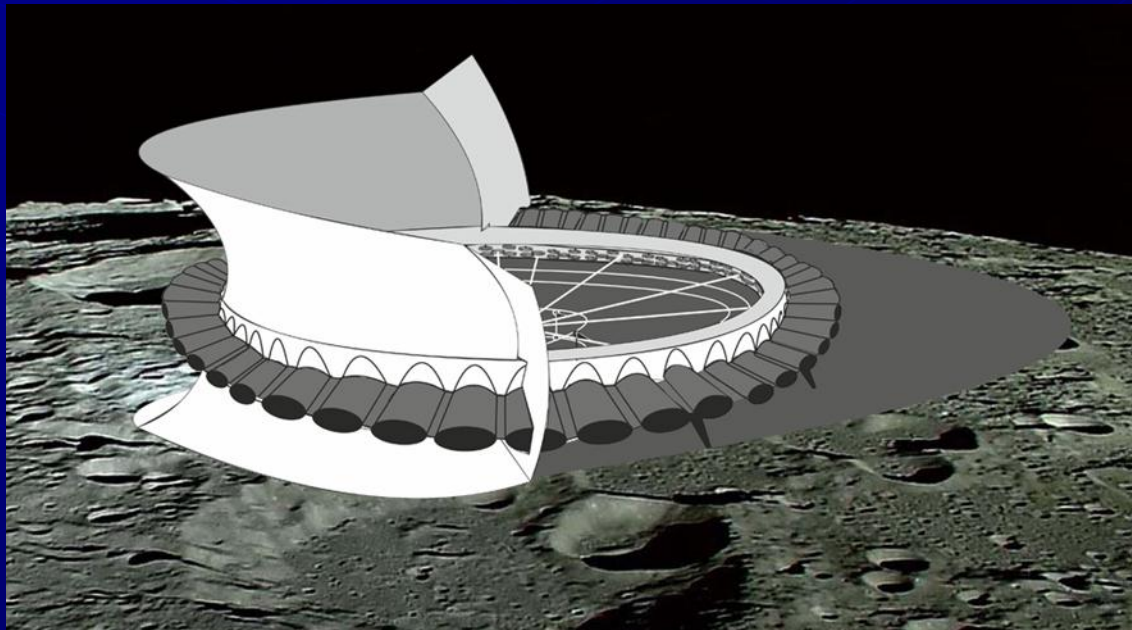


SOLUTION OF THE TRANSPORTATION PROBLEM OF LEAVING TO THE LAND-ORBIT GPS



1, 2 - film-type concentrator and heat trap with elastic elements for deployment from the transport position; 3 - heat-receiving module; 4 - motion transducer; 5 - load-bearing power truss; 6 - electric generator.

The developed method of placing GPS parts in the useful volume of a launch vehicle with a diameter of 6.36 m and a height of 13 m allows it to be deployed in orbit into an operational state with the following parameters: diametric distance between modules $L = 70$ m, outer diameter of a circular parabolic-cylindrical concentrator $D = 120$ m, inner diameter parabolic-cylindrical concentrator, where there is no reception of solar radiation $d = 10$ m, losses in heat-emitting zones "windows" $W = 3.2$ MW, power consumption of solar radiation by a heat-converting system $W = 11.74$ MW.

Material of the Working Body of the Thermal Solar Energy Converter for Space Purposes



The result of the research is the development of a method for continuous production of useful mechanical energy by means of a functional material (working fluid) in the process of heating it by solar radiation in a heat-absorbing zone and cooling in a heat - emitting zone in the optimal design temperature range. Theoretical studies for quantifying power metal segment in the working fluid roles heat generating panel in the operation of thermal solar energy converter (TSEC) space purposes.

A solution has been proposed that allows to significantly increase the efficiency of TSEC by improving the physical and technical characteristics of the segment material. It is shown that it is promising to change by hundredths of one of a series of parameters that characterize the segment material, which makes it possible to compete with photoconverting systems in terms of efficiency, provided that several parameters are optimally combined.

The Mechanism for Carrying out Continuous Useful Work by Anactive Medium

The mechanism for the implementation of continuous useful work by the active medium of the energetic material consists in the periodic transformation of the energy of the incident solar radiation on its surface due to thermal expansion and contraction during cooling. The material of the segments must correspond to the implementation of its main functional purpose: to perform mechanical work continuously, have a minimum specific heat capacity and density, with the maximum values of the coefficient of thermal expansion, elastic modulus during physical loads (compression - tension), and the degree of emissivity of the surface of the plates is close to unity with the possibility placing them in the heat-absorbing zone of the heat trap and outside it in the heat - emitting zone in the shade.

The power, determined by the ratio of the work performed by the segment in the process of heating it to the time spent on this process, is determined by the expression:

$$P = \frac{\int_{T_0}^T 2VE\alpha^2 T dT}{\int_{T_0}^T \frac{h(c\rho + 2E\alpha^2 T)}{nG - \varepsilon\sigma T^4} dT}$$

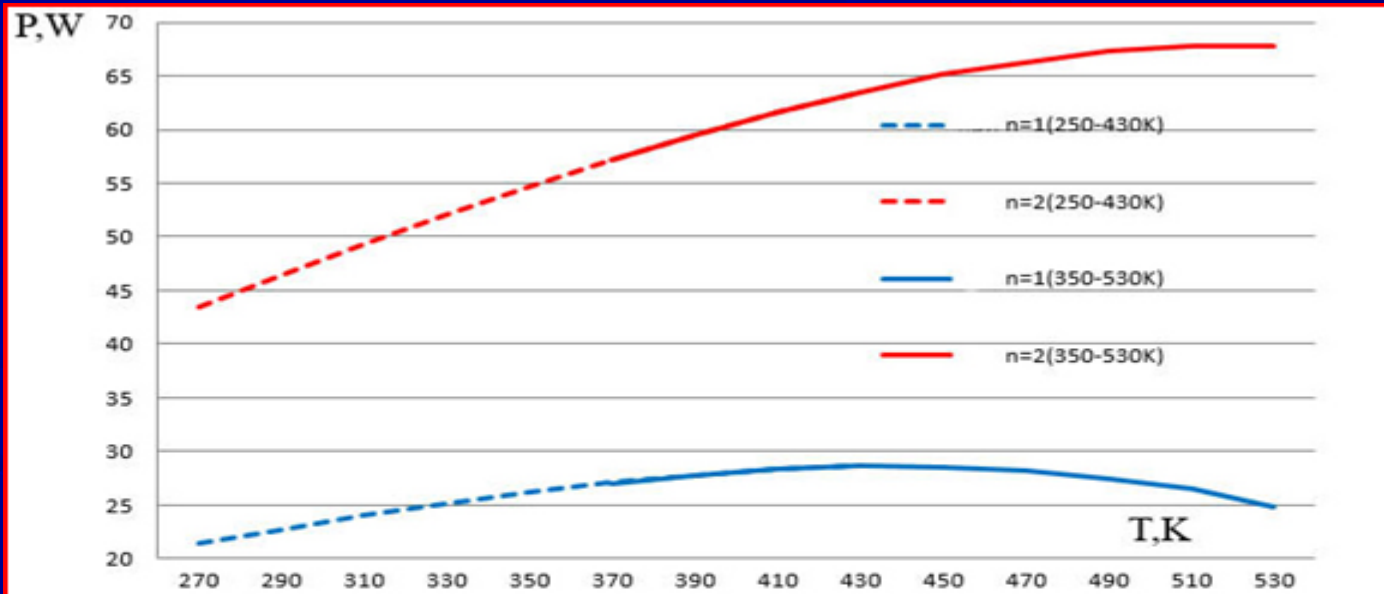


Рис. 1

Fig. 1. Graphs of heated segment capacity in dependence on temperature values.

In the denominator of the expression (5) for determining the time of the panel segment cooling down, the coefficient 2 indicates a two times increase of the area of the heat-radiating surface beyond the thermal trap in the shadow.

Figure 1 shows graphs of the dependence of the power of the segments during heating from a temperature value of 250 K to 430 K in a higher temperature range from 350 K to 530 K, respectively, at concentrations $n = 1$ and $n = 2$.

$$\tau' = \int_T^{T_0} \frac{h(c\rho - 2E\alpha^2 T)}{2\varepsilon\sigma T^4} dT.$$

The power of the segment in the process of heat radiation (cooling) determined by relation (6) is illustrated in Fig. 2.


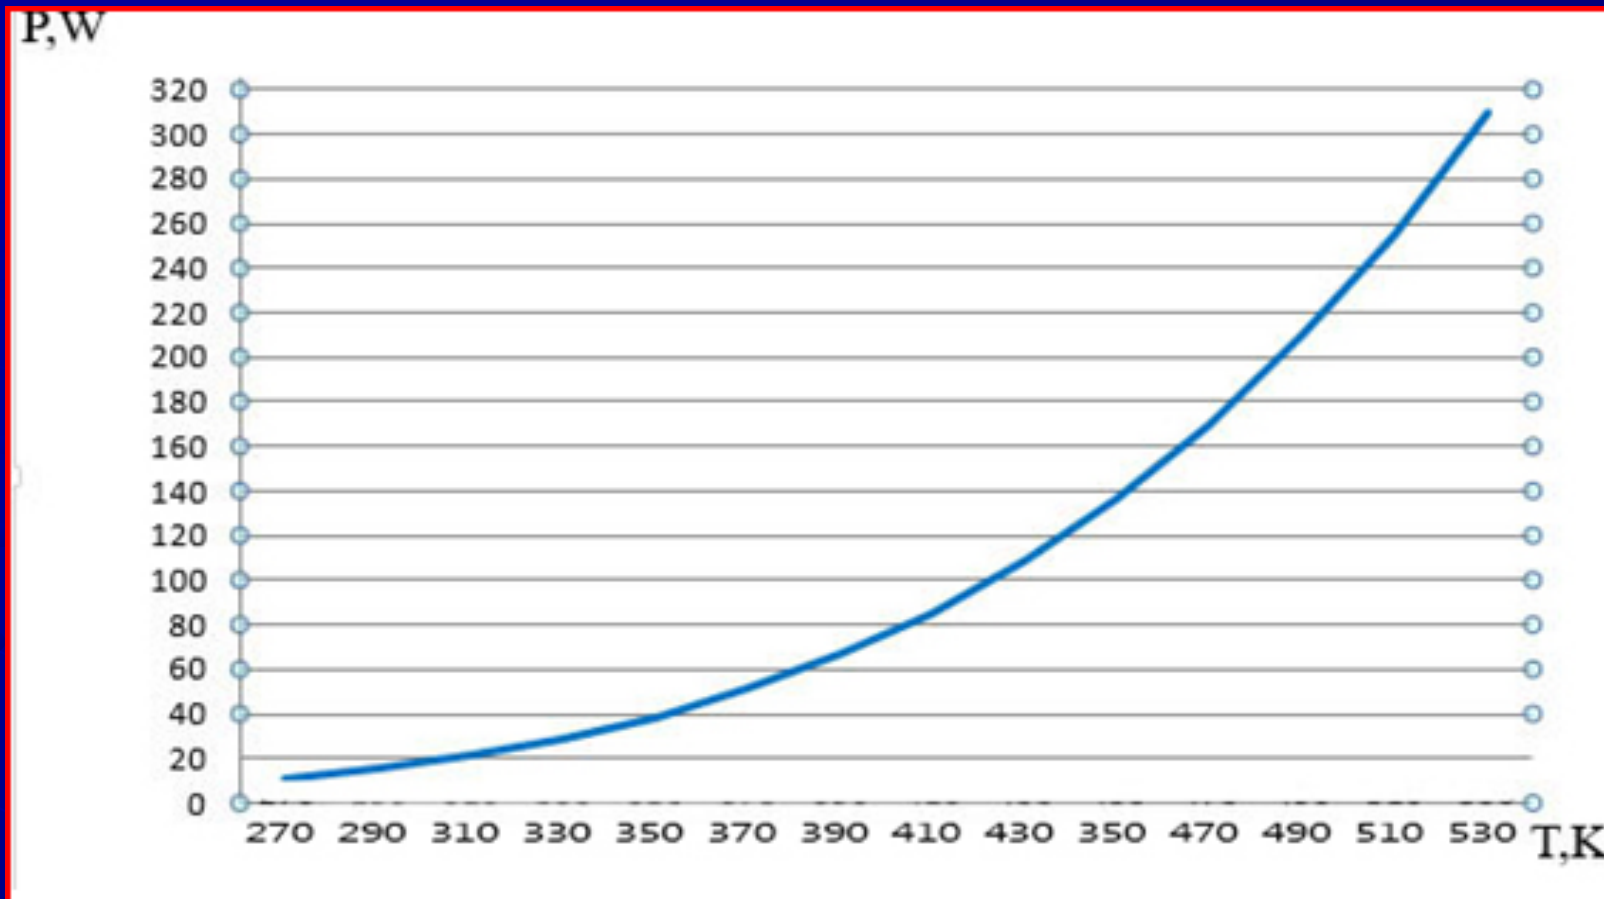


Рис. 2

$$P' = \frac{\int_{T_0}^T 2VE\alpha^2 T dT}{\int_{T_0}^T \frac{h(cp - 2E\alpha^2 T)}{2\varepsilon\sigma T^4} dT}$$

The power for one cycle of the process of heat absorption and heat emission by a segment is determined by expression (7) and the corresponding dependence is shown in Fig. 3.

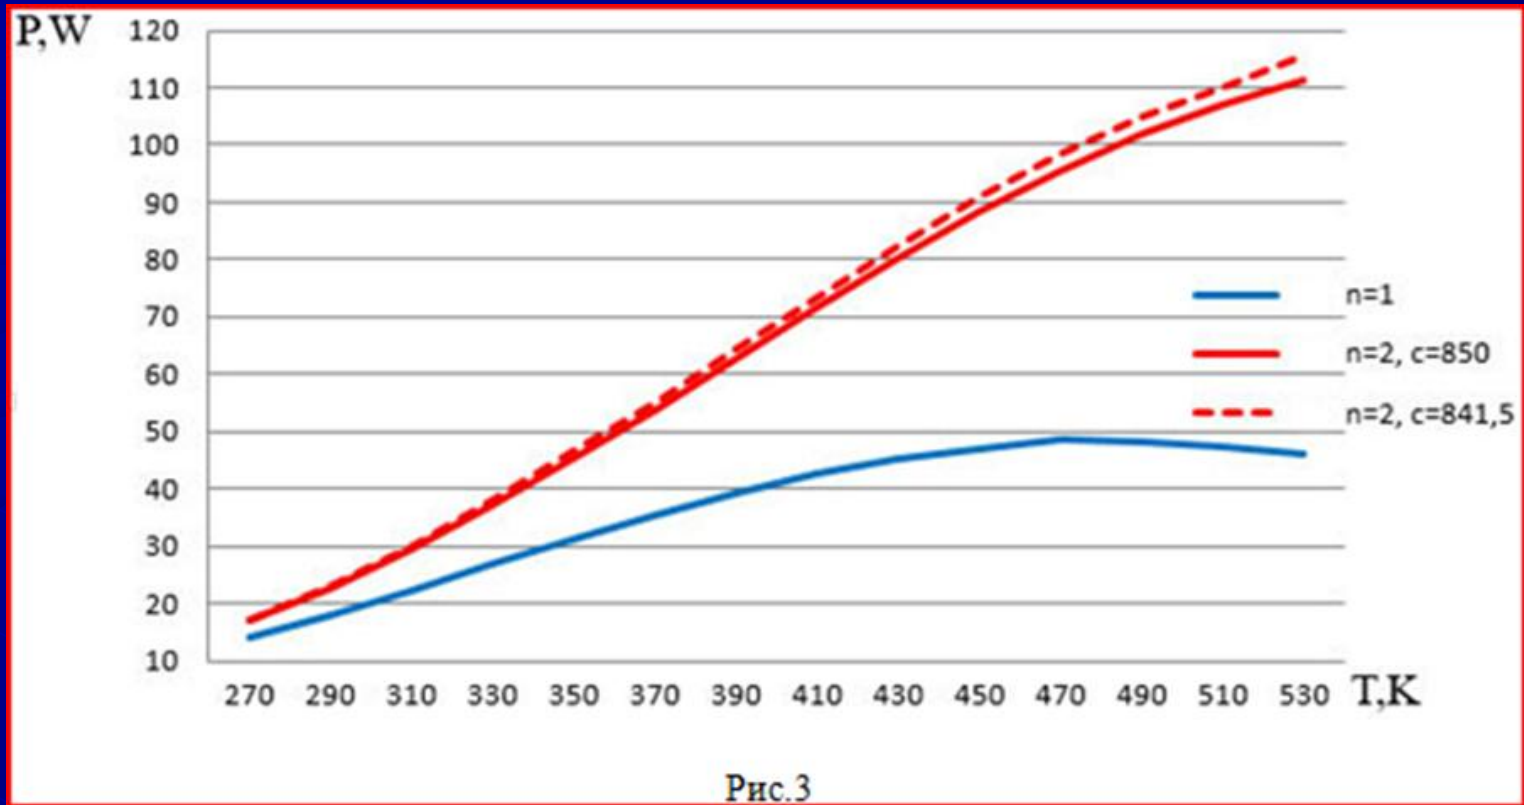

$$P'' = \frac{\int_{T_0}^T 4VE\alpha^2 T dT}{\int_{T_0}^T \frac{hc\rho + 2Eh\alpha^2 T}{nG - \varepsilon\delta T^4} dT + \int_T^{T_0} \left(\frac{hc\rho - 2hE\alpha^2 T}{2\varepsilon\delta T^4} \right) dT}$$

Thanks for reading